



HARVESTING/PROCESSING HEADS



600 SERIES





It's no coincidence that Waratah has been an industry-leader for over 40 years. Because we've always listened to you to design durable, more productive and efficient harvesting and processing heads proven for your application.

At our facilities in Finland and New Zealand, each head is made to order, so you get exactly what you need. Our heads are built to work with advanced technology providing precise control with accurate diameter and length measuring. With on-site facility testing, each product is proven on our time to be profitable on yours.

Our commitment to your success goes beyond product quality. When you put our heads to work, our global support network goes to work for you – from helping you choose the right head, to installation and startup, to being on site when you need us.

We offer the widest range of harvester/processor heads on the market. So whether you're harvesting at the stump, processing at the landing or somewhere in between, Waratah is built to work for you all over the world.



**"I think Waratahs are the toughest out there.
We put a lot of demand on them."**

Ben Reed, Wayne Stone Logging



600 SERIES

Continuous 360-degree rotation
with clean through-nose and
from-the-side hose configurations

Proven in hardwood and softwood applications,
Waratah 600-Series harvesters balance toughness with precision.

Advanced on-board
controller and diagnostics

Heavy-duty
steel frames

Laser find-end
log alignment

Hardened alloy long-lasting steel
pins with split nut pin retention

Single or twin lower
delimb options

Powerful feed motors appropriately sized
for best feeding performance

High-torque main saw motors with
auto-chain tension for long service life and
available in .404 or 3/4" pitch configurations

Rugged saw box designed for
multiple logs, butt flare and low
stump heights when harvesting

Three- or four-wheel synchronized
drive configurations with log shuffling in
four-wheel drive multi-stem applications



High load-bearing hanging bracket and rotator

High performance and efficient valves

Easy to service and well-protected hydraulics

Accurate length measuring in single- or multi-stem applications with many optional wheel styles

Standard top saws in .404 or 3/4" pitch

Optional floating or fixed heavy-duty front knives

Advanced delimb geometry for fast picking and stem catching

Heavy-duty cast and fabricated delimb arms with wear-resistant replaceable knife inserts

Proportional soft clamping for delimb and drive arms for less friction and fuel burn

Feed wheel options to suit any application



HTH616C

Whether you're harvesting, processing or debarking, the versatile HTH616C is quick to handle the task. Although its size is compact, it boasts a large cutting capacity.


OVERVIEW

Harvesting in early-to-late thinnings; productive processing or debarking.

APPLICATIONS





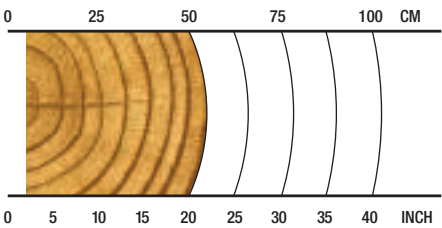

- Hardwood harvesting/processing
- Softwood harvesting/processing
- Debarking
- Multi-tree processing
- Multi-tree harvesting
- Early thinnings
- Late or final thinnings/clear felling

RECOMMENDED RANGE



5-51 cm / 2-20 in.

SPECS

-  **1970 kg / 4,343 lb.**
Net Weight
-  **35 MPa / 5,076 psi**
Max Hydraulic Pressure
-  **510 mm / 20 in.**
Max Delimb Opening
-  **680 mm / 27 in.**
Max Feed Roller Opening
-  **550 mm / 22 in.**
Maximum Sawing Capacity
-  **18-24 metric ton**
Carrier Size



HTH618C

When it comes to superior delimiting quality, the agile HTH618C is perfectly equipped. Its twin lower delimb arms balance productivity with control.


OVERVIEW

Harvesting in early-to-late thinnings; productive processing or debarking.

APPLICATIONS

- Hardwood harvesting/processing
- Softwood harvesting/processing
- Debarking
- Multi-tree harvesting
- Early thinnings
- Late or final thinnings/clear felling

RECOMMENDED RANGE

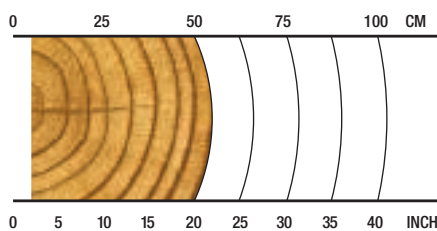

5-51 cm / 2-20 in.

SPECS



2250 kg / 4,960 lb.
Net Weight



35 MPa / 5,076 psi
Max Hydraulic Pressure



510 mm / 20 in.
Max Delimb Opening



680 mm / 27 in.
Max Feed Roller Opening



550 mm / 22 in.
Maximum Sawing Capacity



20-25 metric ton
Carrier Size



HTH622B

Versatility is maximized with the heavy-duty HTH622B. Equipped with exceptional drive power, this popular three-roller model is the ideal size for a variety of applications and can handle the toughest conditions.


OVERVIEW

Harvesting in late thinnings or final harvesting of large timber (head-appropriate), hardwood or softwood; some debarking.

APPLICATIONS

- Hardwood harvesting/processing
- Softwood harvesting/processing
- Debarking
- Multi-tree harvesting
- Early thinnings
- Late or final thinnings/clear felling

RECOMMENDED RANGE

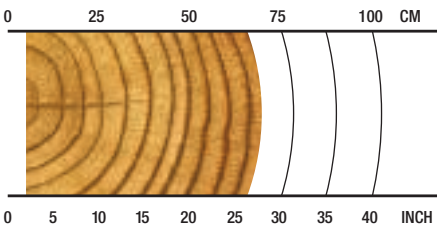

5-66 cm / 2-26 in.

SPECS

-  **2280 kg / 5,027 lb.**
Net Weight
-  **32 MPa / 4,641 psi**
Max Hydraulic Pressure
-  **650 mm / 26 in.**
Max Delimb Opening
-  **730 mm / 29 in.**
Max Feed Roller Opening
-  **750 mm / 30 in.**
Maximum Sawing Capacity
-  **24-30 metric ton**
Carrier Size



HTH622C 4x4

The HTH622C 4X4 takes productivity and efficiency to a higher level with capabilities including multi-tree processing and independent log shuffling – minimizing waste and maximizing your profits.


OVERVIEW

Processing of large diameter timber from log deck; harvesting in late thinnings; final felling of large timber (head appropriate).

APPLICATIONS


Hardwood harvesting/processing
Softwood harvesting/processing
Shovel logging
Late or final thinnings/clear felling
Multi-tree processing

SINGLE STEM RECOMMENDED RANGE



5-66 cm / 2-26 in.

MULTI-STEM RECOMMENDED RANGE (2 LOGS)



5-28 cm / 2-11 in.

SPECS



2760 kg / 6,085 lb.
Net Weight



35 MPa / 5,076 psi
Max Hydraulic Pressure



650 mm / 26 in.
Max Delimb Opening



780 mm / 31 in.
Max Feed Roller Opening



750 mm / 30 in.
Maximum Sawing Capacity



25-35 metric ton
Carrier Size



HTH623C

Productivity abounds with this over-achiever. The perfect match to a 25-ton carrier, the HTH623C provides exceptional power to weight in its proven durable design – achieving supreme feeding speeds, log control and agility – making short work of the toughest applications.


OVERVIEW

Harvesting in late thinnings; final felling of large timber (head-appropriate), hardwood or softwood; some debarking.

APPLICATIONS

Hardwood harvesting/processing
Softwood harvesting/processing
Debarking
Shovel logging
Late or final thinnings/clear felling

RECOMMENDED RANGE

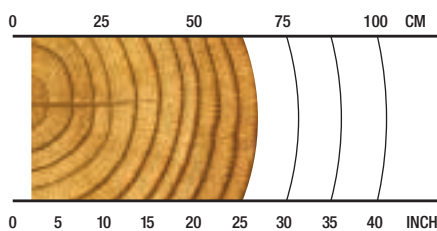

5-69 cm / 2-27 in.

SPECS



3040 kg / 6,702 lb.
Net Weight



35 MPa / 5,076 psi
Max Hydraulic Pressure



700 mm / 28 in.
Max Delimb Opening



875 mm / 34 in.
Max Feed Roller Opening



750 mm / 29 in.
Maximum Sawing Capacity



25-34 metric ton
Carrier Size



HTH624C

Work confidently with the rugged and reliable HTH624C. Equipped with a premium valve, this highly productive processor cuts through any challenges – including big timber.


OVERVIEW

Harvesting in late thinnings; final felling of large timber (head-appropriate), hardwood or softwood.

APPLICATIONS

Hardwood harvesting/processing
Softwood harvesting/processing
Shovel logging
Late or final thinnings/clear felling

RECOMMENDED RANGE

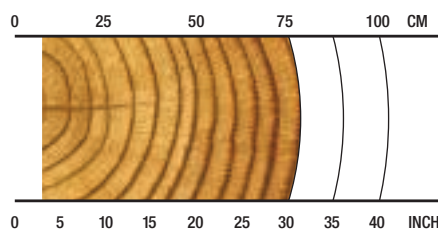

8-76 cm / 3-30 in.

SPECS



3530 kg / 7,782 lb.
Net Weight



35 MPa / 5,076 psi
Max Hydraulic Pressure



760 mm / 30 in.
Max Delimb Opening



850 mm / 34 in.
Max Feed Roller Opening



820 mm / 32 in.
Maximum Sawing Capacity



30+ metric ton
Carrier Size



HTH624C 4x4

Perfectly suited for 27+ metric-ton machines, this four-wheel drive, four-roller head is equally comfortable single stemming large logs or multi-stemming on-demand. Known for exceptional agility and log handling for its size, a large cutting capacity and outstanding traction, the HTH624C 4x4 boosts productivity in demanding applications.


OVERVIEW

Harvesting in late thinnings; final felling of large timber (head-appropriate), hardwood or softwood.

APPLICATIONS


Hardwood harvesting/processing
Softwood harvesting/processing
Shovel logging
Late or final thinnings/clear felling

SINGLE STEM RECOMMENDED RANGE



5-71 cm / 2-28 in.

MULTI-STEM RECOMMENDED RANGE (2 LOGS)



5-33 cm / 2-13 in.

SPECS



3560 kg / 7,848 lb.
Net Weight



35 MPa / 5,076 psi
Max Hydraulic Pressure



710 mm / 28 in.
Max Delimb Opening



875 mm / 34 in.
Max Feed Roller Opening



820 mm / 32 in.
Maximum Sawing Capacity



27+ metric ton
Carrier Size



HTH625C

The aggressive HTH625C optimizes productivity with impressive log control. This high-performer flies through timber with great log handling with twin lower delimb arms.


OVERVIEW

Harvesting in late thinnings; final felling of large timber (head-appropriate), hardwood or softwood.

APPLICATIONS

Hardwood harvesting/processing
Softwood harvesting/processing
Shovel logging
Late or final thinnings/clear felling

RECOMMENDED RANGE

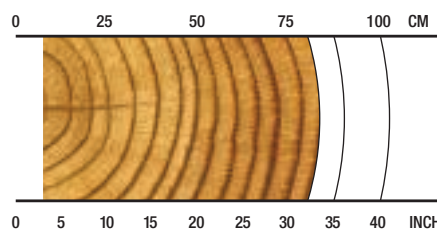

8-81 cm / 3-32 in.

SPECS



4390 kg / 9,678 lb.
Net Weight



35 MPa / 5,076 psi
Max Hydraulic Pressure



800 mm / 31 in.
Max Delimb Opening



850 mm / 34 in.
Max Feed Roller Opening



900 mm / 35 in.
Maximum Sawing Capacity



35+ metric ton
Carrier Size



HTH626 SERIES-II

Large timber is no match for the tough HTH626 Series II, specifically designed to dominate large-diameter wood for felling, delimiting and processing.


OVERVIEW

Final felling or harvesting of large timber; optimum delimiting force.

APPLICATIONS

Softwood harvesting/processing
Shovel logging
Late or final thinnings/clear felling

RECOMMENDED RANGE

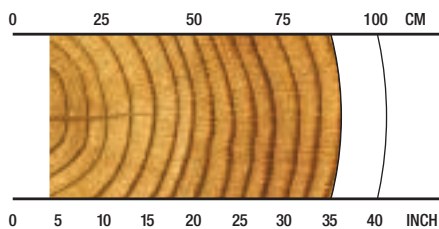

10-88 cm / 4-35 in.

SPECS



4850 kg / 10,692 lb.
Net Weight



35 MPa / 5,076 psi
Max Hydraulic Pressure



900 mm / 35 in
Max Delimb Opening



980 mm / 39 in.
Max Feed Roller Opening



860 mm / 34 in.
Maximum Sawing Capacity



35+ metric ton
Carrier Size



FL85 SERIES-II

Whether you're tethered on steep slope, or just looking for a heavy-duty mid-range felling head, the versatile FL85 Series -II has just the right weight for stability on steep ground, a large cutting capacity and grapple — this durable, multi-use head provides a productivity boost in any felling application.


OVERVIEW

Thinnings, steep slope, shovel logging, topping, storm damage, clean-up.

APPLICATIONS

Shovel logging
 Early thinnings
 Late or final thinnings/clear felling
 Topping
 Storm damage
 Steep slope

RECOMMENDED RANGE

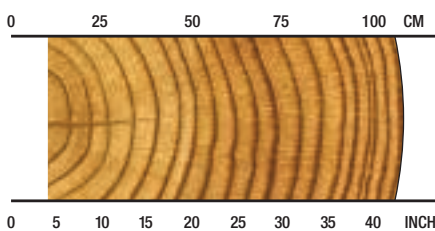

10-110cm / 4-43 in.

SPECS



1747 kg / 3,851 lb.
 Net Weight



25 MPa / 3,625 psi
 Max Hydraulic Pressure



1100 mm / 43 in.
 Max Grapple Opening



925 mm / 36 in.
 Maximum Sawing Capacity



20-27 metric ton
 Carrier Size



FL95



Steep slope-specific tilt design allows felling on 65 degrees without hitting stops.



Optional retractable saw box utilizing full grapple capabilities when shovel logging.



Saw box positioned in felling mode. Provides maximum cutting capacity.

Purpose-built for steep slope applications, the FL95 seamlessly boosts productivity with an optional retractable saw box that is just where you need it when felling, or out of the way when shovel logging. Plus with its broad downslope working envelope, large cutting and extra-large grapple capacities, you'll minimize effort and maximize efficiency.


OVERVIEW

Thinnings, steep slope, shovel logging, topping, storm damage, clean-up.

APPLICATIONS

Shovel logging
Late or final thinnings/clear felling
Topping
Storm damage
Steep slope

RECOMMENDED RANGE

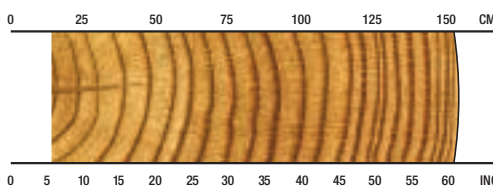

14-158* cm / 5.5-62.2* in.

*with optional retractable saw box

SPECS



2620 kg / 5,776 lb.**
Net Weight



35 MPa / 5,076 psi
Max Hydraulic Pressure



1580 mm / 62 in.
Max Grapple Opening



1000 mm / 39 in.
Maximum Sawing Capacity



30+ metric ton
Carrier Size

** Weight is 2480 kg / 5,467 lb. with Fixed Saw

MEASURING AND CONTROL SYSTEMS

We focus on providing you with accurate diameter and length measuring systems for profitable precision. Simplify operations and boost productivity with real-time statistics and measuring information, and wireless data transfer.

TIMBERRITE™ H-16



Imagine a fast, powerful control system that manages your workload and links your office to the forest.

The productive TimberRite measuring and control system uses a powerful Windows PC, providing accurate measuring technology and responsive head control for efficient operational productivity.

It records production information, tracks productivity, and packages all files in the latest StanForD 2010 format to ensure data interchanges with virtually any professional system in the forest industry.

Additionally, this user-friendly system has email capabilities, and can utilize our WaratahMate™ smartphone app for the efficient and timely transfer of production information and other important files regardless of your location. Configurable as standard with Pre-Selection priority, or optionally with Value Optimization it can manage your output to keep step with market demands. TimberRite keeps you productive and informed to manage your workload for whatever your market requires.

KEY FEATURES

- **Pre-Selection Priority** - (standard) - sequential optimization by cutting list instruction, and alternate log assignments.
- **Value Optimization** - (optional) - value-based optimization, intuitive prognosis through intelligent assessment of advanced matrices.
- **Touch-screen display**, or wireless keyboard and touch pad mouse.
- **Windows™ 7 PC**-based controller integrates the harvester head measuring and control system with the high processing power of a personal computer.
- **StanForD 2010** file structure ensures data interchanges with other professional systems in the forest industry.
- **Automatic file sending** - production reports, worksite instructions, repair follow-ups, calibration history, log tables, machine settings and harvesting instructions.
- **WaratahMate™ smartphone app** - Easily transfer data wirelessly regardless of location, or through email or USB stick.
- **Work & repair statistics** - Monitor uptime, productivity and operating costs.
- **Species specific calibration and soft-clamping** settings for delimb and drive arms.
- **Operator specific settings** and configurable menus for quick navigation and adjustments.
- **Extensive site documentation** – expanded site, contractor, and machine information.
- **Simplified diagnostics** - input and output tests with built-in diagnostic troubleshooting assistance.

OPTIONS

Waratah heads are configurable to your application.
Consult your dealer for option availability.



Configurability

Waratah has a wide range of focused options for harvesting and processing applications including single- and multi-stem processing, multi-tree handling, and all models include options for softwood, crooked hardwood and debarking.



Color Marking

Waratah offers nozzle-applied color marking systems to simplify log identification. Three colors provide many assortment combinations to either the small or large ends, improving sorting and yard safety.



Main Saws, Saw Motors, Top Saws

The 600 series have high-cutting capacity main saws for extra productivity in large wood. Select models have .404 and 3/4" pitch chain options; all main saws include auto chain tensioning and are driven by durable and efficient high torque saw motors. The top saws increase productivity in any processing and crooked wood applications and are standard equipment on all 600 series models.



Measuring Wheels

Application-specific measuring wheels are engineered for accurate and consistent measuring in all tree species with enhancements for log quality. Selections include wide and narrow models, coarse and fine teeth options, and multi-stem, debarking configurations.




Delimb Arms

Select models can be configured for more productivity and log quality enhancements with specific harvesting or processing upper delimb arms, and single or twin lower delimb options. All have durable, pre-formed hardened steel replaceable knife inserts.



Rotators

Waratah offers a productive 360-degree continuous rotation on all of the 600 series models, with options of hoses through the rotate unit or from the side. It assures a cleaner look and more uptime. Also included are options of non-continuous 320-degree and Indexator brand options on select models.



Feed Rollers

Many feed roller options are available for a variety of applications, offering improved traction and reducing fiber damage. Wheel options include eucalyptus debarking, bar, thumbnail, alpine, rubber and non-aggressive styles.



Multi-tree Handling

Select models have multi-tree handling (MTH) capabilities, providing superior accumulating and precise bundle feeding with the option. MTH ability increases productivity and can easily be installed between the rotator and hanging bracket – even on existing heads.



Front Knives

Waratah offers heavy-duty floating or fixed front knife options with specialized profiles and cutting edges for superior delimiting in any application.



Stump Treatment

Stump treatment kits available for select models.

Talk to your Waratah dealer about more available options.



	HTH616C	HTH618C	HTH622B
DIMENSIONS			
Width, head open (mm/in.)	1600 / 63	1600 / 63	1700 / 67
WEIGHT			
Excluding link and some options (kg/lb.)	1970 / 4,343	2250 / 4,960	2280 / 5,026
ROTATION			
	360 continuous or 320 degree	360 continuous or 320 degree	360 continuous or 320 degree
DELIMBING			
Delimiting knives	1 fixed front, 2 moving*, 1 fixed rear (*option for single lower delimb)	1 fixed front, 4 moving, 1 fixed rear	1 fixed/floating, 2 moving*, 1 fixed rear (*option for single lower delimb)
Lower delimb (standard/option, (qty))	option, 1	standard, 2	option, 1
Maximum delimb opening processing arms or felling head grapple opening (mm/in.)	510 / 20	510 / 20	650 / 26
Maximum delimb opening CTL arms (mm/in.)	700 / 28	700 / 28	
Maximum opening lower knives (mm/in.)	650 / 26	650 / 26	740 / 29
DRIVE			
Quantity drive rollers	3	3	3
Motor cc - option 1 (drive, fixed)	(500,315)	(500,315)	(702,400)
Maximum feed speed - option 1 (m/s, ft/s)	8.3 / 27	8.3 / 27	5.4 / 17.8
Maximum roller opening (mm/in.)	680 / 27	680 / 27	730 / 29
Motor cc - option 2 (drive, fixed)	(630,400)	(630,400)	
Maximum feed speed - option 2 (m/s, ft/s)	6.6 / 22	6.6 / 22	
Minimum feed arm diameter (mm/in.)	50 / 2	50 / 2	50 / 2
TOP SAW			
Maximum cut diameter (mm/in.)	320 / 13	320 / 13	400 / 16
Length of saw bar (mm/in.)	420 / 17	420 / 17	640 / 25
Chain type (in.)	0.404	0.404	0.404
Top saw motor displacement	10 cc	10 cc	10 cc
BUTT / FELLING SAW			
Standard Saw	SC100	Waratah AT 3/4"	SC100
Maximum cut diameter (mm/in.)	550 / 22	550 / 22	750 / 29.5
Length of saw bar (mm/in.)	750 / 29	750 / 29	820 / 32
Chain type (in.)	0.404	3/4"	0.404
Saw motor	3/4" - 45 cc & .404 - 20 cc	3/4" - 45 cc	3/4" - 45 cc
Oil tank capacity (L/gal.)	10 / 2.6	10 / 2.6	12 / 3.2
CARRIER RANGE			
Metric tons	18-24 metric tons	20-25 metric tons	24-30 metric tons
HYDRAULIC SYSTEM			
Maximum operating pressure (MPa/psi)	35 / 5,076	35 / 5,076	32 / 4,641
Maximum pump capacity (L/min., gal./min.)	320-360 / 85-95	320-360 / 85-95	300-320 / 79-85
CONTROL AND MEASURING SYSTEM			
	TimberRite H-16, TR100	TimberRite H-16, TR100	TimberRite H-16, TR100
OPTIONAL EQUIPMENT			
Optional Butt Saw	Waratah AT 3/4"	SC100	Waratah AT 3/4"
Maximum cut diameter (mm/in.)	550 / 22	550 / 22	810 / 32
Length of saw bar (mm/in.)	740 / 29	750 / 29	800 / 31
Optional Top Saw			
Maximum cut diameter (mm/in.)			
Length of saw bar (mm/in.)			
No top saw	yes	yes	yes
Continuous 360-degree rotation	yes	yes	yes
Color marking	inquire	inquire	yes
Stump spray	inquire	inquire	inquire
Multi-tree harvesting (*320 degree rotation only)	yes*	no	no
Multi-tree processing	yes	yes	no
Fabricated processing upper delimb arms	yes	yes	no
Cast processing upper delimb arms	yes	yes	yes
Harvesting (CTL) upper delimb arms	yes	yes	no
Debarking feed rollers	yes	yes	yes
Steel thumbnail feed rollers	yes	yes	yes
Alpine	yes	yes	yes
Non-aggressive fixed roller	no	no	yes
Steel ribbed feed rollers	no	no	yes

This brochure has been compiled with care for worldwide circulation. While general information, pictures and descriptions are provided, some illustrations and text may include options and accessories not available in all regions. Please contact your local dealer for details. Waratah reserves the right to change specifications and design for products described in this brochure without notice. No liability for errors and omissions.

	HTH622C 4x4	HTH623C	HTH624C
DIMENSIONS			
Width, head open (mm/in.)	1820 / 72	2000 / 79	2000 / 79
WEIGHT			
Excluding link and some options (kg/lb.)	2760 / 6,085	3040 / 6,702	3530 / 7,782
ROTATION			
	360 continuous or 320 degree	360 continuous or 320 degree	360 continuous or 320 degree
DELIMBING			
Delimiting knives	1 fixed/floating, 2 moving, 1 fixed rear	1 fixed/floating, 2 moving*, 1 fixed rear (*option for single lower delimb)	1 floating, 2 moving, 1 fixed rear
Lower delimb (standard/option, (qty))		option, 1	
Maximum delimb opening processing arms or felling head grapple opening (mm/in.)	650 / 26	700 / 28	760 / 30
Maximum delimb opening CTL arms (mm/in.)			700 / 27.5
Maximum opening lower knives (mm/in.)		885 / 35	
DRIVE			
Quantity drive rollers	4	3	3
Motor cc - option 1 (drive, fixed)	(702,400)	(837,500)	(1048,630)
Maximum feed speed - option 1 (m/s, ft/s)	6.5 / 21	5.2 / 17	4.6 / 15.2
Maximum roller opening (mm/in.)	780 / 31	875 / 34	850 / 33
Motor cc - option 2 (drive, fixed)		(1048,630)	
Maximum feed speed - option 2 (m/s, ft/s)		4.6 / 15.1	
Minimum feed arm diameter (mm/in.)	50 / 2	65 / 2.6	80 / 3
TOP SAW			
Maximum cut diameter (mm/in.)	400 / 16	450 / 18	500 / 20
Length of saw bar (mm/in.)	640 / 25	590 / 23	750 / 29.5
Chain type (in.)	0.404	0.404	0.404
Top saw motor displacement	10 cc	19 cc	20 cc
BUTT / FELLING SAW			
Standard Saw	Waratah AT 3/4	Waratah AT 3/4	Waratah AT 3/4
Maximum cut diameter (mm/in.)	750 / 30	750 / 30	810 / 32
Length of saw bar (mm/in.)	900 / 35	900 / 35	965 / 38
Chain type (in.)	3/4"	3/4"	3/4"
Saw motor	50 cc	45 cc	50 cc
Oil tank capacity (L/gal.)	22 / 4.8	16 / 4.2	16 / 4.2
CARRIER RANGE			
Metric tons	25-35 metric tons	25-34 metric tons	30+ metric tons
HYDRAULIC SYSTEM			
Maximum operating pressure (MPa/psi)	35 / 5,076	35 / 5,076	35 / 5,076
Maximum pump capacity (L/min., gal./min.)	320-360 / 85-95	320-360 / 85-95	320-360 / 85-95
CONTROL AND MEASURING SYSTEM			
	TimberRite H-16, TR100	TimberRite H-16, TR100	TimberRite H-16, TR100
OPTIONAL EQUIPMENT			
Optional Butt Saw	SC100	SC100	
Maximum cut diameter (mm/in.)	750 / 29.5	750 / 29.5	
Length of saw bar (mm/in.)	900 / 35.4	820 / 32	
Optional Top Saw			Waratah 3/4"
Maximum cut diameter (mm/in.)			500 / 20
Length of saw bar (mm/in.)			715 / 28
No top saw	no	yes	yes
Continuous 360-degree rotation	yes	yes	yes
Color marking	no	yes	yes
Stump spray	no	inquire	no
Multi-tree harvesting	no	no	no
Multi-tree processing	yes	no	no
Fabricated processing upper delimb arms	yes	yes	no
Cast processing upper delimb arms	yes	yes	yes
Harvesting (CTL) upper delimb arms	no	no	no
Debarking feed rollers	yes	yes	no
Steel thumbnail feed rollers	yes	yes	yes
Alpine	yes	yes	yes
Non-aggressive fixed roller	no	yes	no
Steel ribbed feed rollers	no	no	no

	HTH624C 4x4	HTH625C	HTH626 SERIES II
DIMENSIONS			
Width, head open (mm/in.)	2000 / 79	2000 / 79	2200 / 87
WEIGHT			
Excluding link and some options (kg/lb.)	3560 / 7,848	4390 / 9,678	4850 / 10,692
ROTATION			
	360 continuous	360 continuous or 320 degree	360 continuous or 320 degree
DELIMBING			
Delimiting knives	1 fixed,/1 floating, 2 moving*, 1 fixed rear (*option for single lower delimb)	1 floating, 4 moving	1 floating, 2 moving
Lower delimb (standard/option, (qty))	option, 1	standard, 2	
Maximum delimb opening processing arms or felling head grapple opening (mm/in.)	710 / 28	800 / 31	900 / 35
Maximum delimb opening CTL arms (mm/in.)			
Maximum opening lower knives (mm/in.)	885 / 35	800 / 30	
DRIVE			
Quantity drive rollers	4	3	3
Motor cc - option 1 (drive, fixed)	(837,500)	(1395,800)	(1395,800)
Maximum feed speed - option 1 (m/s, ft/s)	5.2 / 17	3.5 / 11.4	3.5 / 11.4
Maximum roller opening (mm/in.)	875 / 34	850 / 34	980 / 39
Motor cc - option 2 (drive, fixed)	(1048,630)		
Maximum feed speed - option 2 (m/s, ft/s)	4.6 / 15.1		
Minimum feed arm diameter (mm/in.)	65 / 2.6	80 / 3	100 / 4
TOP SAW			
Maximum cut diameter (mm/in.)	560 / 22	500 / 20	400 / 16
Length of saw bar (mm/in.)	740 / 29	715 / 28	590 / 23
Chain type (in.)	3/4"	3/4"	0.404
Top saw motor displacement	20 cc	20 cc	19 cc
BUTT / FELLING SAW			
Standard Saw	Waratah AT 3/4	Waratah AT 3/4	Waratah AT 3/4
Maximum cut diameter (mm/in.)	815 / 32	900 / 35	860 / 34
Length of saw bar (mm/in.)	1015 / 40	1020 / 40	960 / 38
Chain type (in.)	3/4"	3/4"	3/4"
Saw motor	50 cc	50 cc	50 cc
Oil tank capacity (L/gal.)	16 / 4.2	22 / 5.8	25 / 6.6
CARRIER RANGE			
Metric tons	27+ metric tons	30+ metric tons	35+ metric tons
HYDRAULIC SYSTEM			
Maximum operating pressure (MPa/psi)	35 / 5,076	35 / 5,076	35 / 5,076
Maximum pump capacity (L/min.,gal./min.)	320-360 / 85-95	320-360 / 85-95	320-360 / 85-95
CONTROL AND MEASURING SYSTEM			
	TimberRite H-16, TR100	TimberRite H-16, TR100	TimberRite H-16, TR100
OPTIONAL EQUIPMENT			
Optional Butt Saw			
Maximum cut diameter (mm/in.)			
Length of saw bar (mm/in.)			
Optional Top Saw			
Maximum cut diameter (mm/in.)	Waratah 0.404	Waratah 0.404	
Length of saw bar (mm/in.)	560 / 22	500 / 20	
	820 / 32	750 / 30	
No top saw	no	no	yes
Continuous 360-degree rotation	yes	yes	yes
Color marking	no	yes	yes
Stump spray	no	no	no
Multi-tree harvesting	no	no	no
Multi-tree processing	yes	no	no
Fabricated processing upper delimb arms	yes	yes	yes
Cast processing upper delimb arms	yes	no	no
Harvesting (CTL) upper delimb arms	no	no	no
Debarking feed rollers	no	no	yes
Steel thumbnail feed rollers	yes	yes	no
Alpine	yes	yes	yes
Non-aggressive fixed roller	yes	no	no
Steel ribbed feed rollers	no	no	no

This brochure has been compiled with care for worldwide circulation. While general information, pictures and descriptions are provided, some illustrations and text may include options and accessories not available in all regions. Please contact your local dealer for details. Waratah reserves the right to change specifications and design for products described in this brochure without notice. No liability for errors and omissions.

	FL85 SERIES-II	FL95
DIMENSIONS		
Width, head open (mm/in.)	1822 / 71.7	2100 / 83
WEIGHT		
Excluding link and some options (kg/lb.)	1747 / 3,851	2620 / 5,776
ROTATION		
	360 continuous	360 continuous
DELIMBING		
Delimiting knives		
Lower delimb (standard/option, (qty))		
Maximum delimb opening processing arms or felling head grapple opening (mm/in.)	685 / 27	1580 / 62
Maximum delimb opening CTL arms (mm/in.)		
Maximum opening lower knives (mm/in.)		
DRIVE		
Quantity drive rollers		
Motor cc - option 1 (drive, fixed)		
Maximum feed speed (m/s, ft/s)		
Maximum roller opening (mm/in.)		
Motor cc - option 2 (drive, fixed)		
Minimum feed arm diameter (mm/in.)		
TOP SAW		
Maximum cut diameter (mm/in.)		
Length of saw bar (mm/in.)		
Chain type (in.)		
Top saw motor displacement		
BUTT / FELLING SAW		
Standard Saw	SuperCut 300	
Maximum cut diameter (mm/in.)	925 / 36	1000 / 39
Length of saw bar (mm/in.)	1130 / 44.5	1092 / 43
Chain type (in.)	3/4"	3/4"
Saw motor		
Oil tank capacity (L/gal.)	43 / 11.3	22 / 5.8
CARRIER RANGE		
Metric tons	20-27 metric tons	30+ metric tons
HYDRAULIC SYSTEM		
Maximum operating pressure (MPa/psi)	25 / 3,625	35 / 5,076
Maximum pump capacity (L/min.,gal./min.)	220 / 58	200 / 53
CONTROL AND MEASURING SYSTEM		
OPTIONAL EQUIPMENT		
Optional Butt Saw		
Maximum cut diameter (mm/in.)		
Length of saw bar (mm/in.)		
Optional Top Saw		
Maximum cut diameter (mm/in.)		
Length of saw bar (mm/in.)		
No top saw		
Continuous 360-degree rotation		
Color marking		
Multi-tree harvesting		
Multi-tree processing		
Fabricated processing upper delimb arms		
Cast processing upper delimb arms		
Harvesting (CTL) upper delimb arms		
MenSe feed rollers		
Debarking feed rollers		
Steel thumbnail feed rollers		
Alpine		
Non-aggressive fixed roller		
Steel ribbed feed rollers		



FORESTRY EQUIPMENT

www.Waratah.com