



M300 COMMERCIAL TRAILERS



INDUSTRY BEST WARRANTY

2 YEAR WARRANTY

1 year standard comprehensive and 1 year extended warranty with 5 year structural at no additional cost. *Ask us for details.*

FLEXIBLE FINANCING

Custom financing solutions available to best suit your business. *Ask us for details.*

Flexibility Meets Capability.

Brandt's M300 30-ton tandem lowboy trailer is the ideal, lighter weight solution to easily transport machines to wherever you need them to be. Brandt's mechanically removable gooseneck is the easiest to set in the industry, delivering the deck height adjustability of a hydraulic neck on a mechanical neck trailer. Tandem axles guarantee a tighter turning radius for those hard to get at delivery spots.

① Easier to Own

This trailer is backed by the best support in the business to make ownership stress-free:

- Flexible purchasing options include rentals, rental purchasing, leasing, and conventional financing.
- Brandt's advanced paint protection looks better, lasts longer, and inhibits corrosion for longer trailer life and increased resale value.
- Reliable design and long-lasting components reduce total cost of ownership.

② Easier to Operate

The M300 is designed to reduce operation costs and increase productivity:

- Mechanically removable gooseneck provides easy loading over the front of the trailer while minimizing tare weight.
- Tapered gooseneck and narrow neck profile accommodates larger equipment than any other 30 ton in its class.
- Integrated slip-resistant aluminum pullouts or swing-out outriggers are available, allowing operators to minimize setup times when hauling oversized equipment.

③ Safer

Safety is critical on the jobsite, so the M300 is designed with key features to maximize operator protection:

- Remotely-mounted air-tank drain valves make maintenance safer and faster.
- Available Apitong decking lasts longer and ensures that the operator has safe, stable footing when working on the trailer.
- Optional lighting packages maximize jobsite safety in low-visibility conditions.

Powerful Value. **Delivered.**



SPECIFICATIONS M300 TRAILER

BASE UNIT KEY SPECIFICATIONS

RELIABILITY - RATED CAPACITY		
Rated Load on 16' (ton)	25 (30 Evenly Distributed)	
Nominal Axle Wall Thickness (in)	5/8	
Nominal Axle Rating (lb)	22,500	
DURABILITY - STRUCTURE		
Decking/Floor Material	1 5/16" Apitong	
Paint Finish	Zinc Primer + Polyester Powder Coat	
DIMENSIONS		
Deck Length (ft)*	29'6" @ 60" Axle spacing	33' @ 54" Axle Spacing
Wheelbase (ft) **	42'11" @ 60" Axle Spacing	46'2" @ 54" Axle Spacing
Overall Length (ft)	48'11"	51'11"
Deck Width (ft)	8'6"	10'
Running Gear Width (ft)	8'6"	
Loaded Deck Height (in)	17" @ 5" Ground Clearance	
Adjustable Loaded Ground Clearance (in)	5", 6.5", 8"	
Upper Coupler Height (in)	48" to 50"	
Gooseneck Swing (in) ***	82"	
GOOSENECK FEATURES		
Three position Gooseneck Links	●	
Tapered Gooseneck	●	
Gooseneck Storage Area with Chain Hangers	●	
Protected Air and Electrical Connections	●	
4 Pull-Up D-Rings on corners	●	
2 D-Rings at Bottom Rear	●	
4 Alternating Winches, 3-Bar Style	●	
1 Pair Pull-Out Lights - Gooseneck	○	
Lockable Storage Box Cover	○	
Work Lights	○	

** Deck lengths available from 24' to 34' in 8'6" deck widths; 28'6" to 34' in 10' deck widths

*** 49", 54", and 60" axle spacing available

**** 77" Swing goosenecks are also available

EASY TO OWN - PURCHASE OPTIONS

Cash	○
Rent or Lease*	○
Low Rate Lease*	○

PEACE OF MIND - WARRANTY


1 Year - Comprehensive Bumper to Bumper	●
2 Year - Comprehensive Bumper to Bumper	○
3 Year - Comprehensive Bumper to Bumper	○



DECK FEATURES	
Low Profile Front Loading Ramps	●
Heavy Duty Automatic Anti-Dive Pin	●
8 D-Rings per Side Down Outer Rail	●
8 Alternating Winches, 3-Bar Style	●
7 Chain Slots per Side on Outer Flange	●
2 Pair Inner Pull-Up D-Rings for Cross Chaining	●
Aluminum Pull-Outs with Extruded Traction Profile	○
Steel Swing-Out Outriggers	○
SUSPENSION FRAME FEATURES	
Suspension Type	Hendrickson HT250
Drum Brakes	●
Disc Brakes	○
8.25 x 22.5" Aluminum Wheels	○
255/70R22.5 Tires, up to 305/70R22.5 Available****	○
Full Apitong Decking with Mini Boom Trough	○
Outer Apitong Decking with Full Length Boom Trough	○
2 Chain Pockets for Cross Chaining at Transition	●
2 Alternating Winches, 3-Bar Style	●
4 Flat D-Rings on Corners	●
1 Chain Slot per Side on Outer Web	●
2 Pair Oversize/D Sign Mount Tubes	●
Remote Drain Valve Accessible on Outside of Frame	●
Sealed, Easy Access Air Control Box	●
5 Position Ride Height Valve +/- 1.5"	●
Mudflaps	●
1 Pair Pull-Out Lights - Suspension	○
Battery Back-up Kit for Strobes	○
Oversize sign W/Frame	○
D Sign W/Frame	○
Raised 360 Degree Strobe Lights	○
Hubometer	○
Rear Winch Package – 20,000 lb, Wireless Remote	○

* 255/70R22.5 Standard Highway Tires included

HEAVY HAUL TRAILER DIMENSIONS

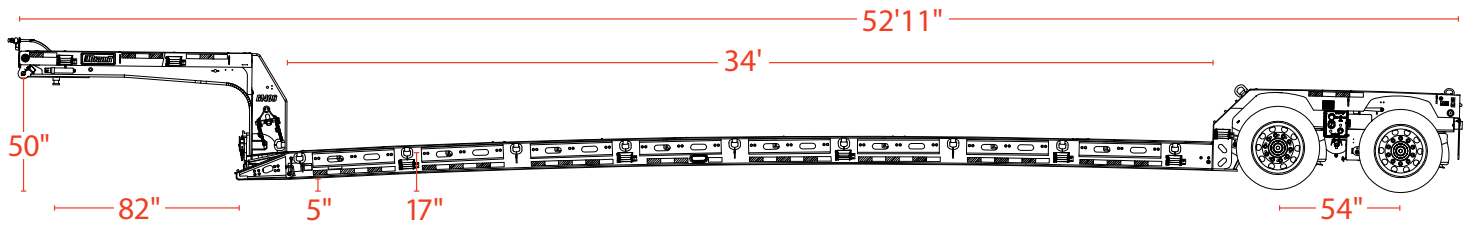

FEATURES

Low Tare Weight

Deliver superior payload capacity compared to competitors' models.

Best-in-Class 5" Ground Clearance

Reduces overall trailer height, potentially eliminating the need for over-height permits.

Three Link Settings

Enable compatibility with truck fifth wheel heights of 48–50", maximizing trailer flexibility, in both loaded and unloaded positions.

Multiple Ride-height Settings

Enable one-touch ride height adjustment +/- 1.5".

Industrial-style Electrical Harness

Makes electrical failure practically a thing of the past.

Tough Powder-coat Finish

Highly durable finish maximizes trailer life and resale value.

Accessible Maintenance Points

Remote air-tank drain valves save you time on daily maintenance.

Easy-access Suspension Air Controls

Increase efficiency with optimized positioning.

Heavy-Duty Anti-Dive Pin

Outlasts competitors' pins, providing superior uptime and lower maintenance costs.

Optional Gooseneck Storage Door

Protects tools from the elements.

Optional Full-length Rear Deck Trough

Deepest in the industry. Provides storage space for excavator booms.

Tapered Gooseneck

Allows you to maximize the size of payload.

Optimized Deck Design

Providing the most deck space on this class of trailer.

Optional reduced swing gooseneck

Adds up to 5" additional deck space.

For more information:
Call us at **1-888-227-2638**
Email us at **sales@brandt.ca**
Or visit us at **brandt.ca/trailers**

© Brandt Industries Ltd. All rights reserved. The Brandt name and logo are trademarks of Brandt Industries Ltd., used under license. All product information and specifications are subject to change without notification. Printed in Canada. Revised 09/2024-CU