



TRAILERS

S600/S700

JEEP

L40

BOOSTERS

C10/C25

FIXED-ROLL SCISSORNECK TRAILERS



INDUSTRY BEST WARRANTY

3 YEAR WARRANTY

1 Year Bumper-to-Bumper Warranty on all components. Extended warranty up to 3 years available at extra cost. *Ask us for details.*

FLEXIBLE FINANCING

Custom financing solutions available to best suit your business. *Ask us for details.*

Fear No Payload.

Brandt's all-new S600 and S700 fixed-roll scissorneck trailers deliver versatile productivity that helps you dominate the hardest jobs — whatever they may be. Whether you're hauling rig components, wellsite shacks, or heavy off-road equipment, these trailers are equipped to handle the task quickly and effectively.

① Easier to Own

These trailers are backed by the best support in the business to make ownership stress-free:

- Flexible purchasing options include rentals, rental purchasing, leasing, and conventional financing.
- Brandt's advanced paint protection looks better, lasts longer, and inhibits corrosion for longer trailer life and increased resale value.
- Reliable design and long-lasting components reduce total cost of ownership.

② Easier to Operate

The S600 and S700 load quickly and easily so you can hit the road sooner:

- Knife-edge gooseneck profile makes it easy to load low ground-clearance vehicles over the front onto the trailer.
- Optional kicker rolls are placed between the first and second axles to reduce friction, making loading and unloading short payloads easier and more efficient.
- Winch and J-hook positioning alternates from side to side, making securing loads easier and more efficient from either side of the trailer.

③ Safer

These trailers maximize your safety in all conditions, allowing you to work confidently:

- Recessed steel plate on the center of the gooseneck prevents winch tackle from damaging the decking.
- Work lights are placed in important loading and unloading areas, including in the control box to make operation easier and safer in adverse conditions.
- Remotely-mounted air-tank drain valves make maintenance safer and faster.

Powerful Value. **Delivered.**

SPECIFICATIONS S600/S700 TRAILERS

BASE UNIT KEY SPECIFICATIONS		
	S600	S700
RELIABILITY - RATED CAPACITY		
Rated Load on 36' (ton)	60	70
Nominal Axle Wall Thickness (in)	3/4	
DURABILITY - STRUCTURE		
Decking/Floor Material	2" Apitong	
Paint Finish	Zince Primer + Polyester Powder Coat	
DIMENSIONS		
Deck Length	41'	46'
Overall Length	53'10"	58'10"
Wheelbase - 88" KP	38'8"	41'5"
Deck Width	9'	
Running Gear Width	9'	
Loaded Deck Height	42"	
Upper Coupler Height	49"	
Gooseneck Swing	80", 112"	
GOOSENECK FEATURES		
Knife Edge Profile	●	
Cable Savers	●	
2 Pairs of Pin Pockets	●	
4 Pairs Alternating 3-Bar Winches/J-Hooks	●	
3 Pairs of Chain Pockets	●	
1/2" Upper Coupler Plate	●	
Links to Pin in Step Deck or Hi-Boy Position	●	
Gooseneck Extension for Tandem Jeep	○	
Swingout Lights	○	
DECK FEATURES		
Easy Access Swing Down Dolly Legs for Unladen Trailer	●	
Ratcheting Live Roll in Center of Deck, Comes with 2 Sets of Support Rollers	●	
Ratcheting Kicker Rolls in Center of Deck		●
11 Pairs of Chain Pockets	●	
6 Pairs of Pin Pockets	●	
2 Pairs of Pipe Pockets	●	
6 Sets of Alternating 3-Bar Winches/J-Hooks	●	

● Included at no extra cost ○ Option available *See Dealer for Details

BASE UNIT KEY SPECIFICATIONS		
	S600	S700
SUSPENSION FRAME FEATURES		
Drum Brakes	●	
PAN22 Disc Brakes	○	
8.25 x 22.5" Aluminum Outboard Wheels	●	
275/70R22.5 Bridgestone M840 On/Off Road Tires	●	
Air Pots Rotated to be in Front of and Above Axle	●	
10" Fixed Tail Roll - Comes with 2 Sets of Support Rollers	●	
8 Pairs of Pin Pockets	●	
10 Pairs of Pin Pockets		●
4 Pairs of Pin Pockets at Tail Roll	●	
4 Pairs of Chain Pockets	●	
5 Pairs of Chain Pockets		●
3 Alternating Sets of Winches/J-Hooks	●	
4 Alternating Sets of Winches/J-Hooks		●
Rebound Limiters	●	
Strobe Lights	●	
Remote Drain Valve Accessible on Outside of Frame	●	
Air Lift Kit on Axle 1	●	
Air Lift Kits on Axles 1 & 2		●
Mudflaps	●	
Ratcheting Kicker Rolls Between Axles 1 & 2	○	
Ratcheting Kicker Rolls Between Axles 2 & 3		○
Work Lights	○	
Battery Back-up Kit for Strobes	○	
EASY TO OWN - PURCHASE OPTIONS		
Cash	○	
0% Combo or Low Rate Finance*	○	
Low Rate Lease*	○	
PEACE OF MIND - WARRANTY		
1 Year - Comprehensive Bumper to Bumper	●	
2 Year - Comprehensive Bumper to Bumper	○	
3 Year - Comprehensive Bumper to Bumper	○	

L40 JEEP

BASE UNIT KEY SPECIFICATIONS	
RELIABILITY - RATED CAPACITY	
Rated Load (ton)	40
Nominal Axle Wall Thickness (in)	5/8
DURABILITY - STRUCTURE	
Paint Finish	Zince Primer + Polyester Powder Coat
DIMENSIONS	
Overall Length	27'3"
Wheelbase	19'3"
Running Gear Width	8'6"
Loaded 5th Wheel Height	58"
Upper Coupler Height	52"
Axle Spacing	49"
5th Wheel Travel	94"
Tractor Swing Clearance	79", 100"
Jeep Swing	179"
GOOSENECK FEATURES	
Aluminum Fenders - Including Mudflap	○
MAIN FRAME FEATURES	
6" Live Roll	●
Premium 2 Speed Landing Gear	●
Brake Release Valve	●
Suspension Dump Valve	●
Suspension Air Gauge	●
Weatherproof Lid to House Air Valves	●
Remote Drain Valve Accessible on Outside of Frame	●
Mudflaps	●
Chain Pockets for Lifting	●
SUSPENSION FRAME FEATURES	
Drum Brakes	●
PAN22 Disc Brakes	○
8.25 x 22.5" Aluminum Wheels	●
275/70R22.5 Bridgestone M840 On/Off Road Tires	●
Rebound Limiters & Air Bag Shutoffs	●
EASY TO OWN - PURCHASE OPTIONS	
Cash	○
0% Combo or Low Rate Finance*	○
Low Rate Lease*	○
PEACE OF MIND - WARRANTY	
1 Year - Comprehensive Bumper to Bumper	●
2 Year - Comprehensive Bumper to Bumper	○
3 Year - Comprehensive Bumper to Bumper	○

C10/C25 BOOSTER


BASE UNIT KEY SPECIFICATIONS		
	C10	C25
RELIABILITY - RATED CAPACITY		
Rated Load (ton)	10	25
Nominal Axle Wall Thickness (in)	3/4	
DURABILITY - STRUCTURE		
Paint Finish	Zince Primer + Polyester Powder Coat	
DIMENSIONS		
Overall Length	13'7"	19'5"
Interaxle Spacing	12'7"	14'8"
Running Gear Width	8'6"	
Axle Spacing	N/A	50"
MAIN FRAME FEATURES		
Axle Steering w/ Air Controlled Lock for Backing Up	●	
Bolt-on Jack Legs	●	
4 Airbag Custom Suspension w/ Shock Absorbers	●	
10 Airbag w/ Shock Absorbers		●
Regulated Air Operation	●	
Brake Release Valve	●	
Suspension Dump Valve	●	
Suspension Air Gauge	●	
Weatherproof Lid to House Air Valves	●	
Remote Drain Valve Accessible on Outside of Frame	●	
D-Sign/Oversize sign	○	
Mudflaps	●	
Chain Pockets for Lifting	●	
SUSPENSION FRAME FEATURES		
Drum Brakes	●	
PAN22 Disc Brakes	○	
8.25 X 22.5" Aluminum Outboard Wheels	●	
275/70R22.5 Bridgestone M840 On/Off Road Tires	●	
Rebound Limiters	●	
EASY TO OWN - PURCHASE OPTIONS		
Cash	○	
0% Combo or Low Rate Finance*	○	
Low Rate Lease*	○	
PEACE OF MIND - WARRANTY		
1 Year - Comprehensive Bumper to Bumper	●	
2 Year - Comprehensive Bumper to Bumper	○	
3 Year - Comprehensive Bumper to Bumper	○	

● Included at no extra cost ○ Option available *See Dealer for Details


FIXED-ROLL SCISSORNECK TRAILERS

DIMENSIONS

S600

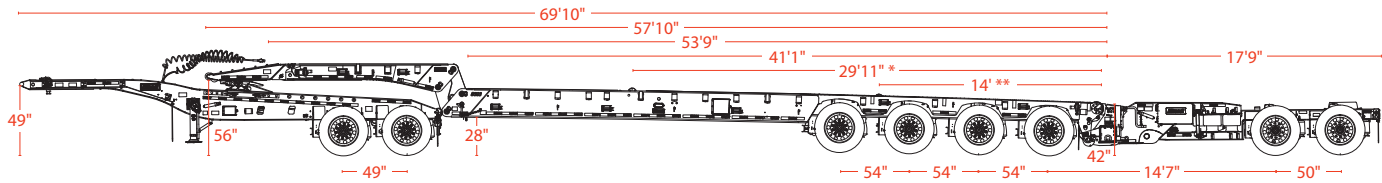

S700

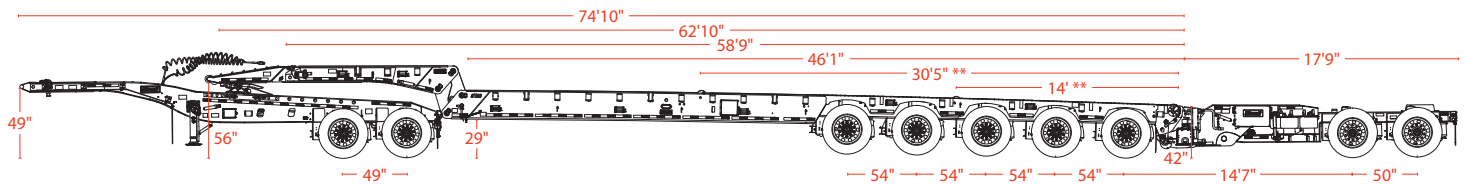

* Belly roll position
** Kicker roll position

FEATURES

Full Deck 10' Width Fixed-roll

Comes complete with support rollers to maximize durability.

Illuminated Control Box

Makes these trailers easier and safer to operate.

Gooseneck Design and Multiple King-pin Settings

Allows these trailers to utilize tandem- and tri-drive trucks for superior flexibility.

Single- and Tandem-Axle Booster Compatibility

Makes it easy to adapt to restrictions and keep working during road ban seasons.

Heavy-duty 3/8" Full-length Wheel Covers

Protects trailer suspension.

Swingout Wide-load Lights

Ensures safe transportation on roadways.

Tractor Brake-signal Boost

Increases braking performance.

Low 42" Loaded Deck Height

Prevents potential over-height issues.

Axle Air Lift

Allows these trailers to work on three axles, reducing wear and maintenance.

For more information
Call us at 1-888-227-2638
Email us at trailersales@brandt.ca
Or visit us at www.brandt.ca

Brandt Truck Rigging & Trailers
1806 2 Street
Nisku, AB, Canada
T9E 0W8