

# HD+ 70i VV


Tandem roller with two vibrating roller drums  
Tandem rollers Series HD+ / Series H186









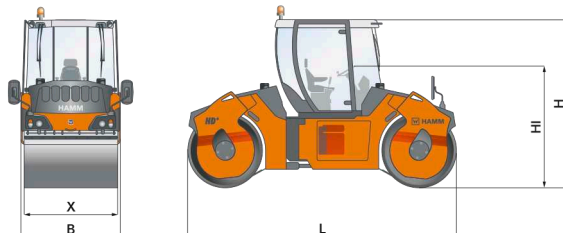



## HIGHLIGHTS HD+

- > 3-point articulation for even weight distribution and excellent directional stability
- > Simple, intuitive and language-neutral control
- > Excellent view of machine and construction site
- > Seat-operating unit can be moved and rotated
- > Track offset for comfortable starting and driving away and compacting at curbsides

Machine dimensions		
Total length (L)	mm • in	4480 • 176.4
Width (B)	mm • in	1620 • 63.8
Total height (H)	mm • in	2890 • 113.8
Drum width (X)	mm • in	1500/1500 • 59.1/59.1
Height, loading, min. (HI)	mm • in	2080 • 81.9



EU Stage  
IIIB/EPA  
Tier 4

TECHNICAL DATA		Unit	HD+ 70i VV
	<b>Weights</b>		
	Operating weight with cab	kg • lbs	7350 • 16,207
	Operating weight with ROPS	kg • lbs	7180 • 15,832
	Operating weight, max.	kg • lbs	9800 • 21,609
	Static linear load, front/rear	kg/cm • lbs/in	25,0/24,0 • 140.0/134.4
	French classific., data/class		19,8/VT1
	<b>Machine dimensions</b>		
	Total length	mm • in	4480 • 176.4
	Total height with cab	mm • in	2890 • 113.8
	Height, loading, min.	mm • in	2080 • 81.9
	Wheelbase	mm • in	3340 • 131.5
	Total width with cab	mm • in	1790 • 70.5
	Max. working width	mm • in	1635 • 64.4
	Curb clearance, left/right	mm • in	750/750 • 29.5/29.5
	Turning radius, inside	mm • in	4230 • 166.5
	<b>Drum dimensions</b>		
	Drum width, front/rear	mm • in	1500/1500 • 59.1/59.1
	Drum diameter, front/rear	mm • in	1140/1140 • 44.9/44.9
	Drum thickness, front/rear	mm • in	17/17 • 0.7/0.7
	Drum type, front		Smooth/non-split
	Drum type, rear		Smooth/non-split
	Track offset, left/right	mm • in	135 • 5.3
	<b>Diesel engine</b>		
	Manufacturer		DEUTZ
	Type		TCD 2.9 L4
	Number of cylinders		4
	Power rat. ISO 14396, kW/PS/rpm		55,4/75,3/2500
	Power rating SAE J1349, kW/HP/rpm		55,4/74,2/2500
	Emission standard		EU Stage IIIB/EPA Tier 4
	Exhaust gas after-treatment		DOC
	<b>Drive</b>		
	Speed, working gear	km/h • mph	0-6,0 • 0.0-3.7
	Speed, transportation gear	km/h • mph	0-12,0 • 0.0-7.5
	Regulation, infinitely variable		Hammtronic
	Climbing ability, vibration on/off	%	35/40
	<b>Vibration</b>		
	Vibration frequency, front, I/II	Hz • vpm	48/58 • 2,880/3,480
	Vibration frequency, rear, I/II	Hz • vpm	48/58 • 2,880/3,480
	Amplitude, front, I/II	mm • in	0,63/0,35 • .025/.014
	Amplitude, rear, I/II	mm • in	0,63/0,35 • .025/.014
	Centrifugal force, front, I/II	kN • lbs	84/69 • 18,900/15,525
	Centrifugal force, rear, I/II	kN • lbs	84/69 • 18,900/15,525
	<b>Steering</b>		
	Oscillation angle +/-	°	10
	Steering, type		Articulated steering
	<b>Sprinkler system</b>		
	Water sprinkler, type		Pressure
	<b>Tank capacity/Fill capacity</b>		
	Fuel tank, capacity	L • Gal	120 • 31.7
	Water tank, capacity	L • Gal	700 • 184.9
	<b>Sound level</b>		
	Acoustic power LW(A), sticker		106
	Acoustic power LW(A), measured		105

#### EQUIPMENT

12 V outlet, 2 large working and rear view mirrors, Foldable scraper, Dashboard with displays, indicator lights and switches, Tilttable dashboard, Pressure water sprinkling with interval switch, ECO mode, Operator's platform with entry from both sides, Speed-controlled water sprinkling system, Speed preselect, Vibration-insulated operator's platform, Track offset, hydraulic, Spray system with spray bars front and rear, Water filtering (triple), Water tank front and rear, can be filled from both sides, Central water drain, Handrail at operator's platform

#### OPTIONAL EQUIPMENT

ROPS, rigid, Heating, Steering column with comfort exit and tilttable dashboard, Additional drive lever, left, Radio, Protective roof, Edge pressing and cutting equipment, Chip spreader, Anti-freeze injection, Frequency control, Speedometer, Automatic engine-off function, HAMM Temperature Meter (HTM), Track offset display, Back-up alarm, Working light, Rotating beacon, Drum edge lighting

#### WIRTGEN AMERICA

6030 Dana Way  
 Antioch, TN 37013  
 Phone +1 615-501-0600  
 Fax +1 615-501-0691  
 info.america@wirtgen-group.com  
 www.wirtgen-group.com/america

#### HAMM AG

Hammstraße 1  
 D-95643 Tirschenreuth  
 Tel +49 9631 80-0  
 Fax +49 9631 80-111  
 www.hamm.eu

